





Titen HD® Installation Guide

The Titen HD screw anchor is for use in cracked and uncracked concrete and masonry. It is the ultimate choice to provide fast and efficient installation. The Titen HD (THD) is designed for dry, interior, non-corrosive environments. The Titen HD stainless steel (THDSS) is for use in severe environments where exposure to the elements and corrosion is a concern.

Tools

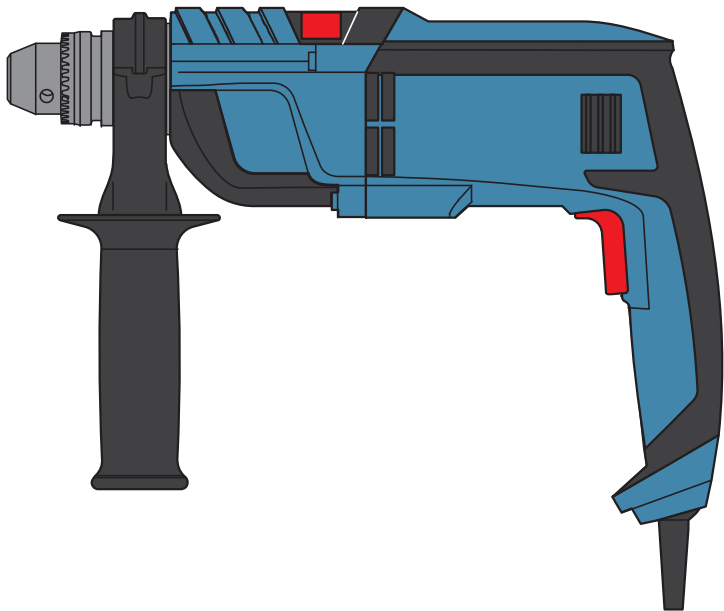


Hammer

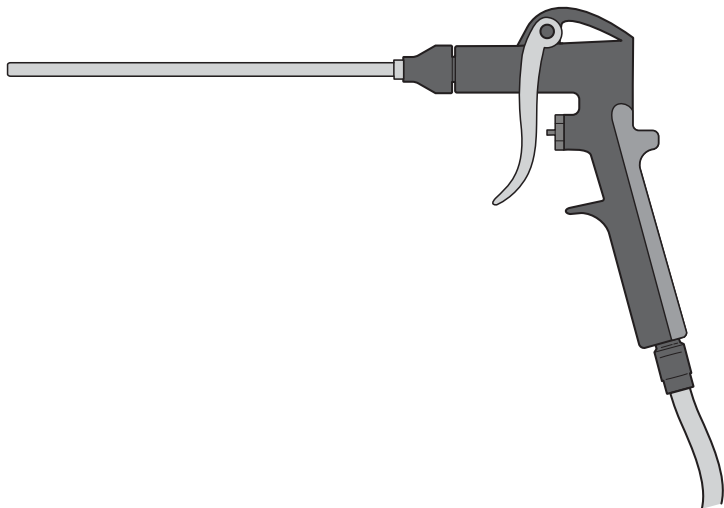

Air Gun


We use cookies on this site to enhance your user experience. By clicking "I Agree", you are giving your consent for us to set cookies. [Privacy Policy](#)

I Agree

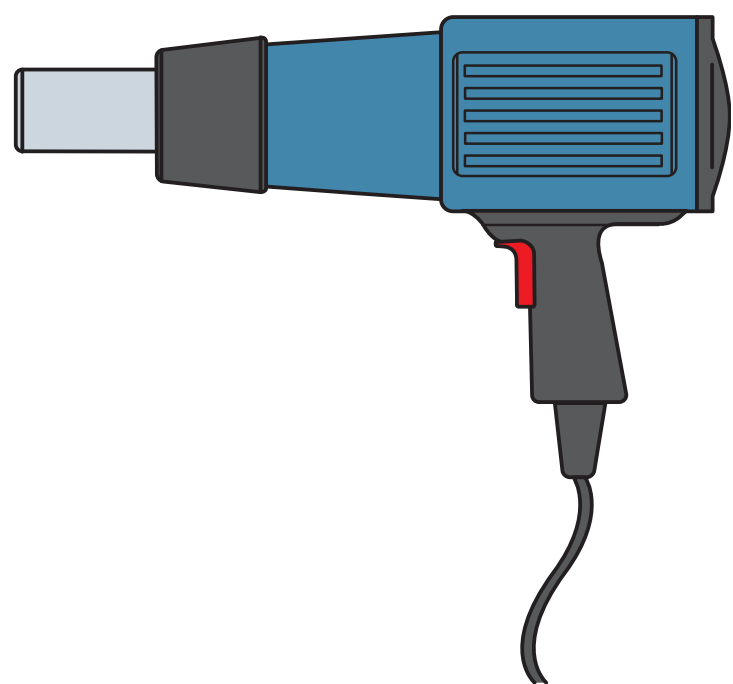


Impact Wrench

Other Similar Anchors

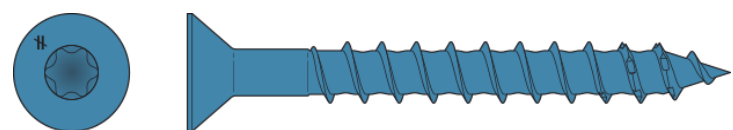


Titen HD Countersunk Screw Anchor
Anclaje de tornillo avellanado Titen HD

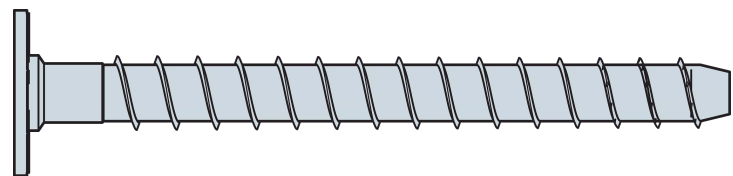

Titen HD Heavy-Duty Screw Anchor with Washer-Head
Anclaje de tornillo de servicio pesado con cabeza tipo arandela


Installation Steps

1

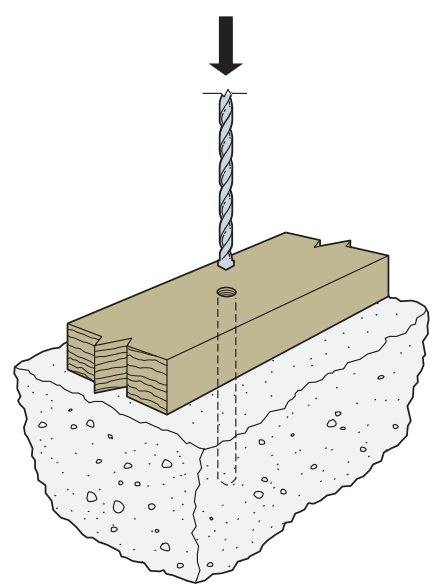


2

We use cookies on this site to enhance your user experience. By clicking "I Agree", you are giving your consent for us to set cookies. [Privacy Policy](#)

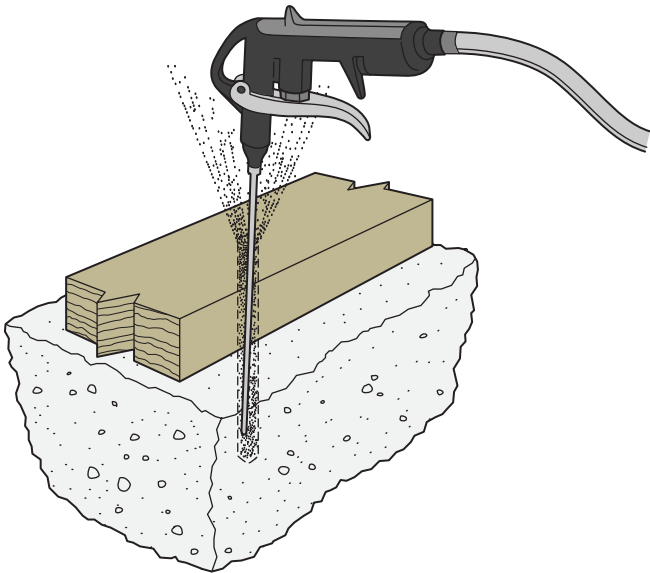


3

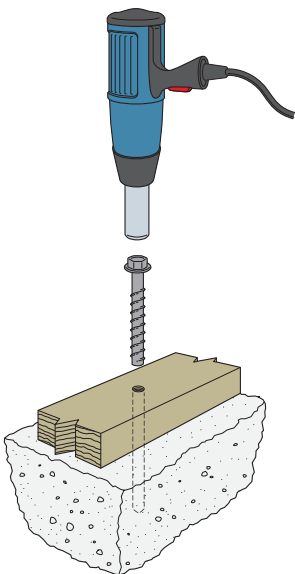


Washer or bearing plate as required by building code.
Arandela o disco de presión según lo requiera el código de construcción.

Alternative Options

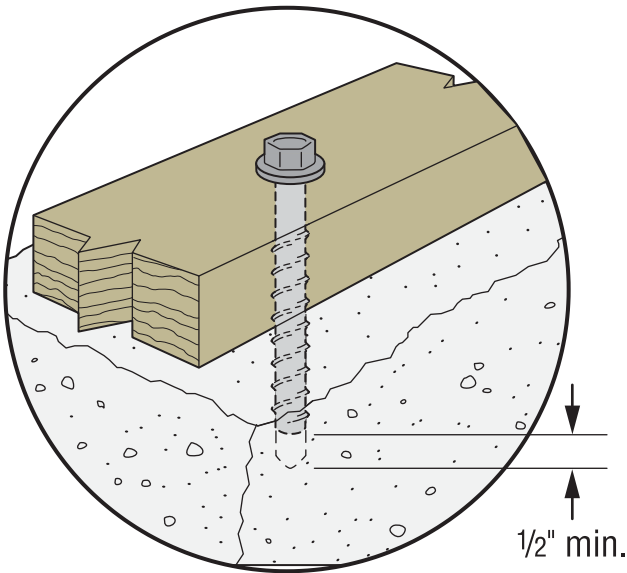

We use cookies on this site to enhance your user experience. By clicking "I Agree", you are giving your consent for us to set cookies. [Privacy Policy](#)

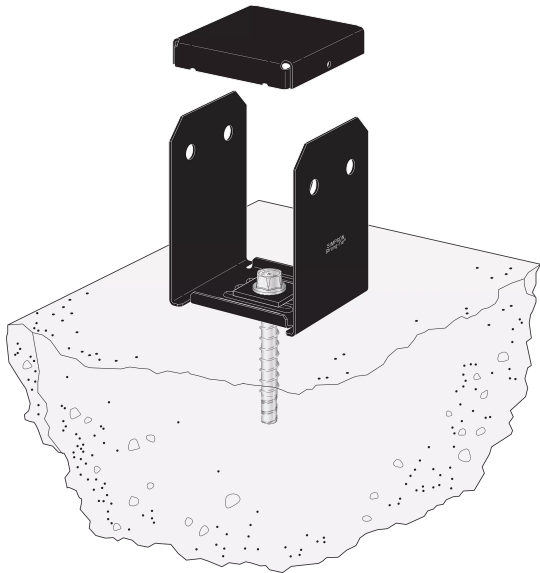

Similar

Similar

Installation Table

Titen HD Diameter (in.) Diámetro de Titen HD (pulg.)	Hex Wrench Size (in.) Tamaño de llave hexagonal (pulg.)
1/4	3/8
3/8	9/16
1/2	3/4
5/8	15/16
3/4	1 1/8

Hole size equals anchor diameter.

El tamaño del orificio es igual al diámetro del anclaje

We use cookies on this site to enhance your user experience. By clicking "I Agree", you are giving your consent for us to set cookies. [Privacy Policy](#)